
PTFE Packing with Kynol Fiber Corners



Code: RGSP606

Description

Braided from KynolTM fiber and PTFE fiber. It contains the advantage both PTFE and kynol. It has good strength and lubricates.

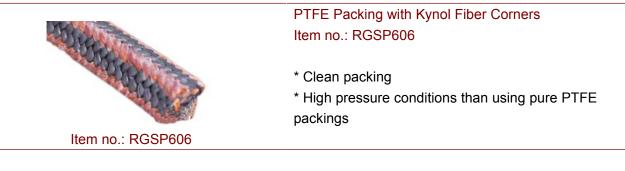

Typical Application

- * Suited well where graphite impregnation not be acceptable
- * For abrasive media, and where contamination is not permitted
- * Chemical plants and pulp and paper mills
- * Rotating and reciprocating pumps, washer journals, liquor pumps, refiners etc.

Technical Data

Material	100% Kynol fiber and PTFE
Temperature Range	-200 up to +260 oC atmosphere
Rotating	20 bar
Reciprocating	100 bar
Static	200 bar
Shaft Speed	20 m/s in rotary
PH	1~13
Density	1.5g/cm3